

Center Corner Points


Make for Lap (2); Twin (4); Queen (4) Blocks

Note: These blocks are made oversized and trimmed to a 9 1/2" square.


Cutting Directions for Lap quilt, makes 2 blocks

Back ground fabric

A - Cut (1) 10 1/2" Square and sub cut




B—Cut (1) 10 3/4" Square and sub cut



Your Chosen Fabric

C—Cut (1) 10 3/4" Square and sub cut




Set aside your leftover triangles B & C for another use.


Cutting Directions for Twin & Queen quilt, makes 4 blocks

Back ground fabric

A - Cut (2) 10 1/2" Square and sub cut




B—Cut (1) 10 3/4" Square and sub cut




Your Chosen Fabric

C—Cut (1) 10 3/4" Square and sub cut



Center Corner Points Assembly

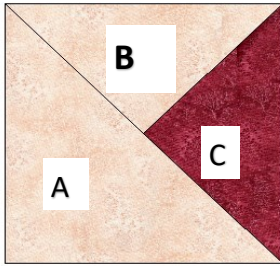


1. Stack and layout your fabrics to ensure your triangles are in correct order



2. Sew piece B to piece C and press to dark fabric



3. Fold Piece A in half and finger press center

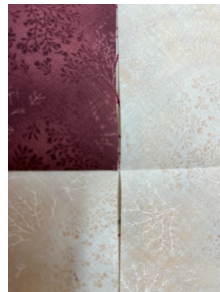


5. Line Up the creased line of Piece A with the center line of your B/C piece and sew them together.

5. Open your block and press your block ensuring all seams are flat. Then square up your block to 9 1/2" inches.

Squaring your Blocks.

There are many tools available for squaring your blocks. Squaring a quarter square triangle is a bit tricky. I have a favorite tool, but it doesn't support a square larger than 6 1/2". If you happen to have a perfect sized square marked for squaring it is very simple....

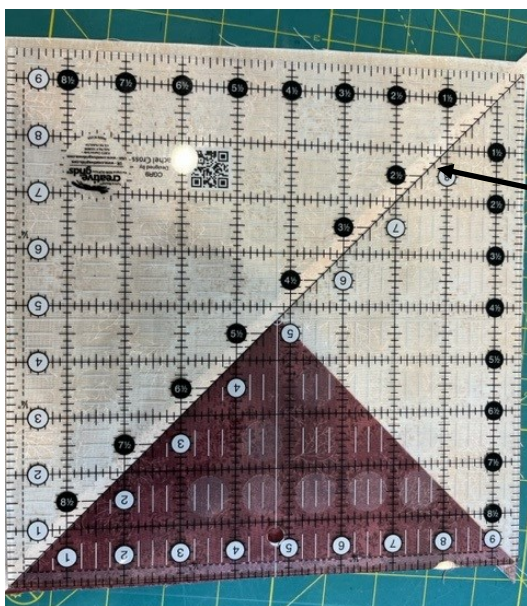


Line up your diagonal line along the largest triangle seam


Align the corner of your ruler with the fabric seam, ensuring you keep your point.

Trim all 4 sides with your rotary cutter.


Method when using a square up ruler that is larger than your square, use the following method.

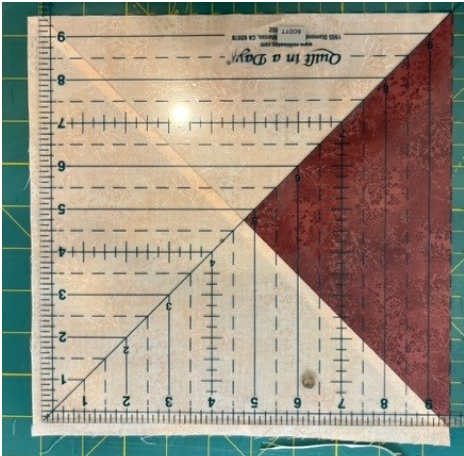

1. Align your diagonal line along the shorter seam.

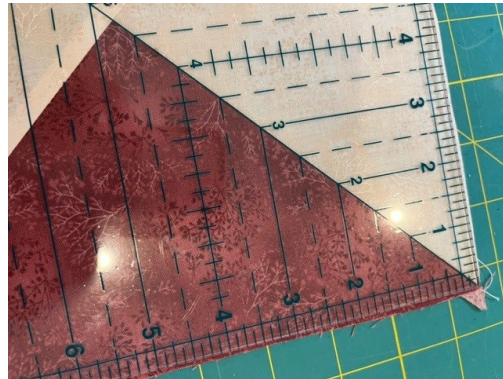

2. Align the line that is the size of your block to match right on the seam line. In this case it is the 9 1/2" mark.

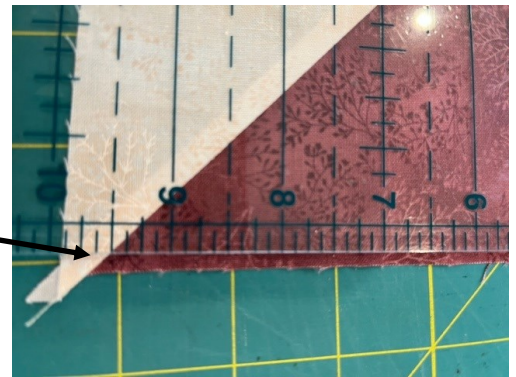

3. Trim with your rotary cutter the two exposed sides and then rotate cutting ruler to align the 9 1/2" marks on your previously cut edges and finish trimming.

After you complete the December blocks, lay out on your design wall and enjoy your progress.

